



MODEL / 型号	TC 300	TC 600	TC 900	TC 1200	TC 1500	TC 1800	TC 2000	TC 2200	TC 2500
Model AT-A - 型号-水平缠绕机	300	600	900	1200	1500	1800	2000	2200	2500
Model ST - 型号-顶部覆膜机	500	900	1200	1400	1700	2000	2200	2500	2700
Ø Max spools (mm) - 最大直径Ø (mm)	800	800	800	800	800	800	800	800	800
Weight max per each spool (Kg) - 膜卷重量 (Kg)	70	70	70	70	70	100	100	100	100
Heigh max spools (mm) - 顶部膜膜宽(mm)	400	800	1000	1250	1600	1800	2000	2400	2600
Installed powerfull (kW) - 功率 (kW)	2,5	2,3	2,6 - 3,7	3,8 - 5	4 - 5,2	5 - 5,75	5,1 - 5,85	6 - 6,7	7,4 - 9,2
Power Supply - 电源	400 V 3Ph+T 50-60 Hz	400 V 3Ph+T 50-60 Hz	400 V 3Ph+T 50-60 Hz	400 V 3Ph+T 50-60 Hz	400 V 3Ph+T 50-60 Hz	400 V 3Ph+T 50-60 Hz	400 V 3Ph+T 50-60 Hz	400 V 3Ph+T 50-60 Hz	400 V 3Ph+T 50-60 Hz
Weight (Kg) - 重量 (Kg)	660	800	1000	1400	1700	1900	2200	2400	2700

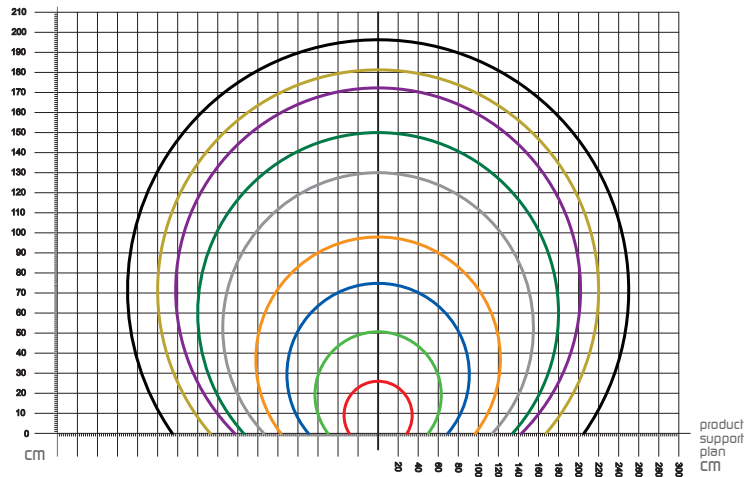

■ TC 300	Diameter for passing / 通过环直径	340 mm
■ TC 600	Diameter for passing / 通过环直径	630 mm
■ TC 900	Diameter for passing / 通过环直径	910 mm
■ TC 1200	Diameter for passing / 通过环直径	1220 mm
■ TC 1500	Diameter for passing / 通过环直径	1550 mm
■ TC 1800	Diameter for passing / 通过环直径	1800 mm
■ TC 2000	Diameter for passing / 通过环直径	2000 mm
■ TC 2200	Diameter for passing / 通过环直径	2200 mm
■ TC 2500	Diameter for passing / 通过环直径	2500 mm

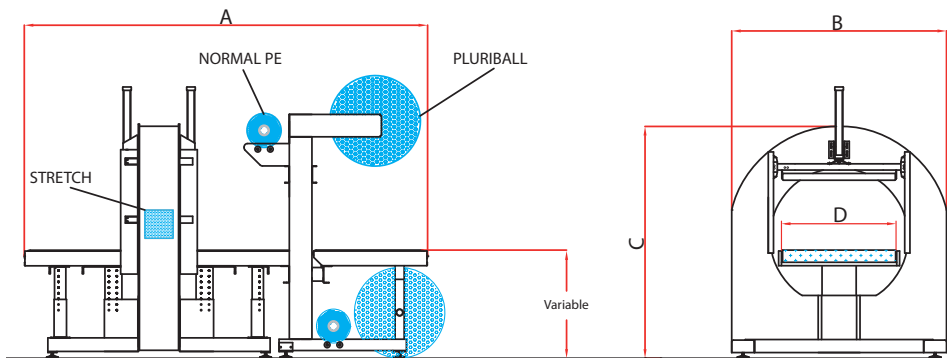

MODEL 型号	A mm	B mm	C mm	D mm
TC 300	3600	1000	1530	250
TC 600	3600	1350	1720	400
TC 900	3600	1525	1830	650
TC 1200	3600	1900	2180	1000
TC 1500	3600	2260	2450	1240
TC 1800	3600	2500	2550	1545
TC 2000	3600	2800	2700	1700
TC 2200	3600	3000	2900	2900
TC 2500	3600	3300	3200	3200

PAIKPAC

水平式缠绕机

派楷包装设备（上海）有限公司

电话：021-69775066

邮箱：info@paikpac.cn

网址：www.paikpac.cn

型号 **AT-S**
半自动




半自动水平式缠绕机

型号 AT-S

STRETCH FILM
SPOOL DIAMETER Ø 250 mm
WIDTH 125 - 250 - 500 mm

拉伸缠绕膜
膜外径Ø250 mm
膜宽度 125 - 250 - 500 mm
纸芯直径 Ø 76 mm

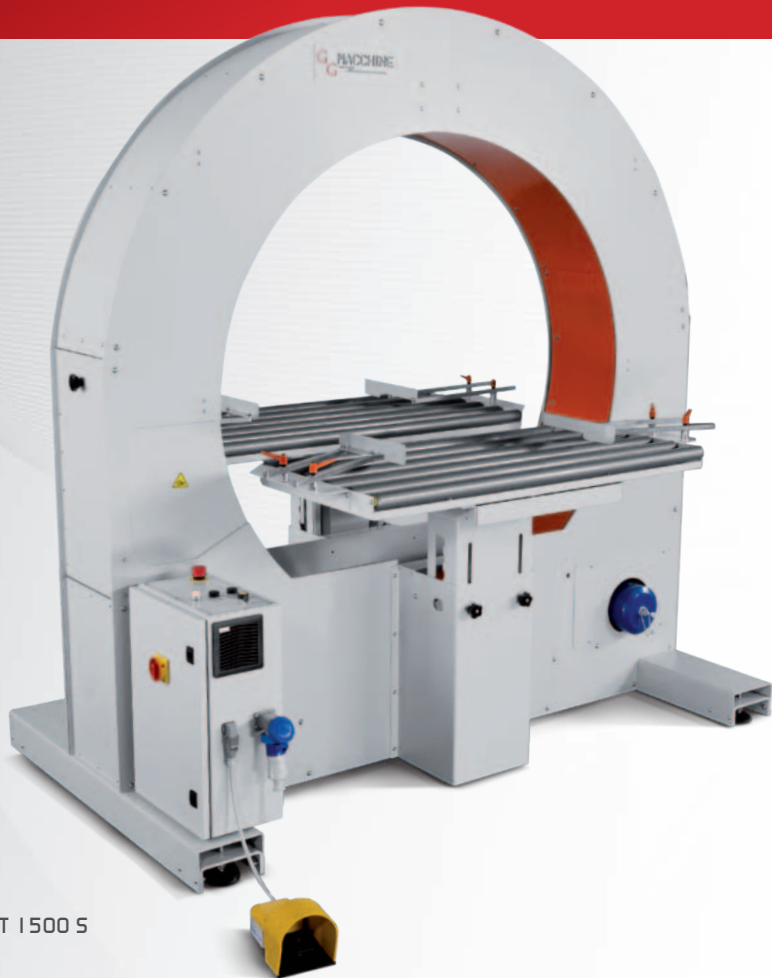

Mod. AT 1500 S

Top model of the range GG Machine for the Semi-Automatic series. The machines of the series AT- S are build using our well known and tested ROBUSTNESS STRUCTURE MONO-BLOCK. Made entirely of heavy steel and suitable for spools of stretch film of a width up to 500 mm. The use of material which reduces wear and spare parts caps the maintenance costs. This brings the product at the top of its class.

The machines of series AT-S are equipped of free roller conveyors, at call covered in PVC, turn out flexible and simple in their use: after the set of the product the operator starts and controls the cycle with the pedal. All the operations of winding, hooking and cutting of the film happen in an automated way. Due to the different diameters of the rotation unit a vast number of products of more different sizes and shapes can be wrapped.

Perfect for the wrapping of doors, windows, cabinet doors, furniture kit, mounted furniture, wooden profiles, plastic and metal, aluminium extrusions, cardboard boxes, panels of wood or metal, sandwich for constructions, panels for the isolation, products with irregular shape etc.

顶级型号的GG系列半自动机器。AT-S系列的机器是使用我们众所周知的经过测试的坚固结构单块构建的。完全由重型钢制成, 适用于宽度达500mm的拉伸缠绕膜卷。使用减少磨损的材料和备件可以降低维护成本。这使产品在同类产品中名列前茅。

AT-S系列的机器配备了自由辊式输送机, 滚筒表面PVC, 使用起来灵活简单: 在设置好产品后, 操作员启动并用踏板控制。卷取、夹膜和切割膜的所有操作都是自动进行的。由于旋转装置的直径不同, 可以包裹大量不同尺寸和形状的产品。

适用于门、窗、柜门、家具套件、安装家具、木型材、塑料和金属、铝挤压件、纸板箱、木板或金属板、建筑夹层、隔离板、不规则形状产品等的包装。

RANGE OF MODELS

产品型号

- AT 300 S
- AT 600 S
- AT 900 S
- AT 1200 S
- AT 1500 S
- AT 1800 S
- AT 2000 S



The automatic film hooking, cutting and holding unit allows the automation of the wrapping process.

气动夹膜器和切膜机构, 自动运行在全自动包装过程中



The spool holder unit is in an easy-to-reach position for a fast change of the spool and insertion of the film.

缠绕膜更换快速和方便
通过透视窗可以看到膜消耗量和运行状态;
操作者打开膜架安全窗, 快速更换新膜卷



SETTING OF THE CONVEYOR HEIGHT
Our R-LOCK system enables a quick change of the working height and ensures a perfect flatness between the input and the output conveyors.

手动调节输送机高度
我们的R-LOCK系统使我们能快速调节工作台面高度, 确保进料和出料输送机都处一个水平面上

TECHNICAL PROPERTIES

- Rotation steel unit, high load capacity, driven by wheels which are dragged by a belt.
- Spool holder and gear roller mechanical adjustable clutch.
- Automatic Unit of hooking, holding and cutting.
- PLC to control the wrapping cycle.
- Ring rotation speed variable.
- Power supply voltage 220V 50-60 Hz single-phase.
- Air pressure in exercise: 6 bar.
- Control over the wrapping cycle through the external pedal. Start and stop of the process.
- Free roller conveyors with zinc rollers infeed and outfeed.
- Manually adjustable conveyor height due to our innovative system R-LOCK with snap in preset gap of 40 mm.
- Infeed and outfeed side guides.

技术描述

- 驱动轮驱动旋转环旋转
- 膜架和齿轮辊机械膜架, 离合器调节束紧力
- 气动冷切割和夹膜器
- 光电自动侦测产品启动和停止缠绕机
- PLC控制包装周期
- 脚踏开关启动和停机缠绕机
- 自由无动力滚筒在进料和出料输送机
- 旋转环的速度可调节, 变频器调节
- 手动调节输送机的高度因为是我们革新即R-LOCK机械结构
- 进料和出料侧边机械导轨
- 气压: 6bar
- 压缩空气消耗量: 5NL/分钟
- 电源: 220V 50HZ 单相



Mod. AT 900 S

半自动水平缠绕机

型号 AT-S


可选项配置

ACCESSORY AT-S



The lateral side guides are manually adjustable to centre at best the products of different widths. Their adjustment is easily to manage.

机械限位导轨在侧边, 手动调节产品在进料中心上, 根据不同的产品宽度

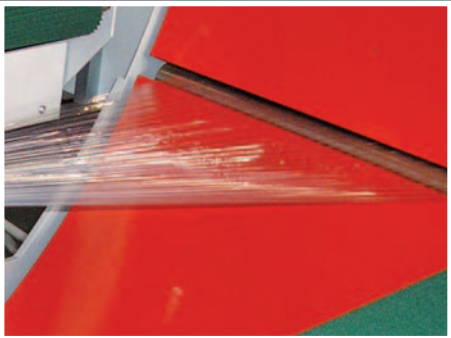

The complete closure of the machine ensures the highest security level.

封闭式设计, 安全性高.



Start cycle
Using the pedal the operator has the control over the wrapping cycle and keeps always an optimal safety distance.

脚踏式启动和停止缠绕机.



Mod. AT I 500 S



MECHANICAL PRE-STRETCH OF THE FILM OF 100%

It reduces the consumption of the stretch film of 100%. It allows a better packaging at a lower cost.

机械式预拉膜架100%

降低膜的消耗量, 预拉比100%, 降低膜的消耗成本



LATERAL GUIDES WITH FREE ROLLERS PVC COATED

This option is indicated for products with a delicate surface.

侧导轨

保证产品直线度




ROLLERS PVC COATED

The PVC coating, to avoid scratching, protects the surface of the product during the handling.

PVC滚筒

PVC滚筒避免和产品表面的磨损, 不伤产品和操作者手

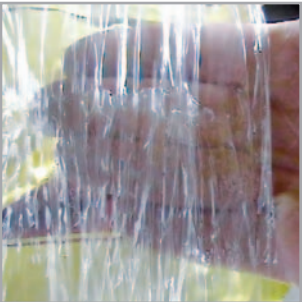

END FILM WELDING

Unit of hooking and cutting of the film with integrated End Film Welding. Ensures the hooking, the cutting and the welding of the film, with a perfect close fitting on the product.

封膜机构

将尾膜封在膜之间, 确保膜不拖尾和包装质量




V-SHAPED FREE ROLLER CONVEYORS

Unlike the plane roller conveyors, this solution positions always the product in the centre of the conveyors, no matter the shape and size. For this reason it's indicated for round products.

V型输送机

V型输送机让所有产品都居中, 无论产品外形和尺寸

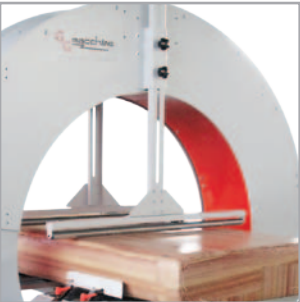

VERTICAL PRESSURE WITH FREE ROLLER FOR A MANUAL ADJUSTMENT

Enables the stabilisation of the product during the wrapping cycle, avoiding leaps and lateral movements.

垂直压轮, 高度手动调节

缠绕过程中压着产品在进料和出料方向, 防止产品打滑和包装不佳