



MODEL / 型号	AT 300 S			AT 600 S			AT 900 S			AT 1200 S			AT 1500 S			AT 1800 S			AT 2000 S		
Film width (mm) - 膜宽(mm)	125	250	500	125	250	500	125	250	500	125	250	500	125	250	500	125	250	500	125	250	500
Ø Max film spool (mm) - 最大Ø F直径 (mm)	250	250	-	250	250	-	250	250	250	250	250	250	250	250	250	250	250	250	250	250	250
Ø Core diameter (mm) - 最大纸芯直径 Ø (mm)	76	76	-	76	76	-	76	76	76	76	76	76	76	76	76	76	76	76	76	76	76
Rot. speed (rpm) - 旋转速度(rpm)	200	150	-	120	100	-	120	100	60	100	80	50	90	70	50	70	60	40	70	50	40
Installed powerfull (kW) - 功率 (kW)	1,1	1,1	-	0,75	0,75	-	0,75	0,75	2,2	1,1	1,1	2,2	1,1	1,5	2,2	1,5	2,2	2,2	1,5	1,5	2,2
Power Supply - 电源	220 V SINGLE 50/60 HZ			220 V SINGLE 50/60 HZ			220 V SINGLE 50/60 HZ			220 V SINGLE 50/60 HZ			220 V SINGLE 50/60 HZ			220 V SINGLE 50/60 HZ			220 V SINGLE 50/60 HZ		
Weight (Kg) - 重量(kg)	300	400	-	350	500	-	450	550	700	700	850	1000	800	1000	1200	1000	1200	1500	1200	1200	1700

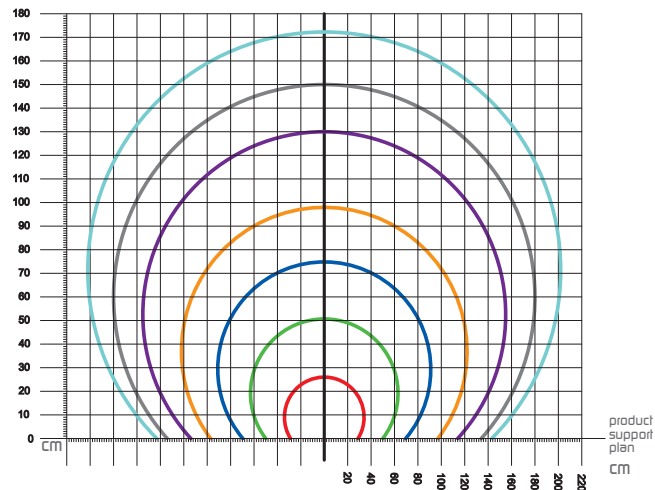

■ AT 300 S	Diameter for passing / 通过环直径	340 mm
■ AT 600 S	Diameter for passing / 通过环直径	630 mm
■ AT 900 S	Diameter for passing / 通过环直径	910 mm
■ AT 1200 S	Diameter for passing / 通过环直径	1220 mm
■ AT 1500 S	Diameter for passing / 通过环直径	1500 mm
■ AT 1800 S	Diameter for passing / 通过环直径	1820 mm
■ AT 2000 S	Diameter for passing / 通过环直径	2020 mm

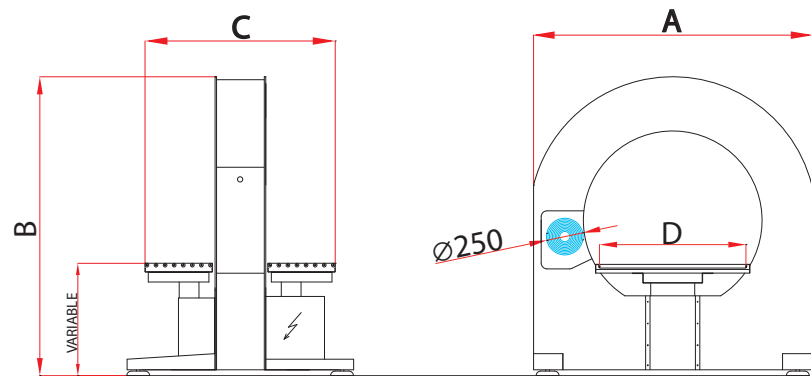

MODEL 型号	FILM SPOOL WIDTH (mm) 膜宽(mm)	A mm	B mm	C mm	D mm
AT 300 S	125	1000	1500	1200	250
	250	1000	1500	1330	250
AT 600 S	125	1350	1690	1200	400
	250	1350	1690	1330	400
AT 900 S	125	1525	1800	1200	600
	250	1525	1800	1330	600
	500	1525	1800	1700	600
AT 1200 S	125	1900	2140	1390	1000
	250	1900	2140	1530	1000
	500	1900	2140	2080	1000
AT 1500 S	125	2260	2390	1390	1250
	250	2260	2390	1530	1250
	500	2260	2390	2000	1250
AT 1800 S	125	2500	2500	1390	1550
	250	2500	2500	1530	1550
	500	2500	2500	2000	1550
AT 2000 S	125	2900	2700	1390	1800
	250	2900	2700	1530	1800
	500	2900	2700	2000	1800

全自动水平缠绕机

型号 BOX-A 全自动



PAIKPAC

派楷包装设备（上海）有限公司
电话：021-69775066
邮箱：info@paikpac.cn
网址：www.paikpac.cn

全自动水平缠绕机

型号 BOX-A

STRETCH FILM
SPOOL DIAMETER Ø 125 mm
WIDTH 125 mm

拉伸缠绕膜
膜外径 Ø 125 mm
膜宽度 125 mm
纸芯直径 Ø 38 mm

Mod. BOX 1000 A

As entry-level model in the range of GG Macchine, the BOX semi-automatic is ever since the flagship model of the company and represents the best proportion between investment and efficiency. The natural evolution of this model brought to the development and realisation of the AUTOMATIC version.

Due to the different diameters of the rotation unit the range covers completely any type of product category of a large variety of shapes and sizes. Versatility, usability, robustness, reliability, the use of material which reduces wear and spare parts, and what caps the maintenance costs, this brings the product at the top of its class.

Compared to the semi-automatic model BOX-S, in the series BOX-A the cycle is fully automatic.

The machines of the series BOX-A are flexible and easy in their use. Their employment can happen with or without the aid of the operator, in fact they are planned to be insert also in completely automatic lines. Structurally, compared to the semi-automatic series BOX-S they are equipped with belt conveyors, photocells to survey the product, vertical pneumatic pressures to stabilise the product during the wrapping with the 6 banding programs.

All types of products can be wrapped from profiles in wood, plastic and metal, aluminium extrusions, tubes in plastic, textile, cardboard boxes, shutters, awnings, panels in wood or metal, doors, flaps, all types of furniture.

GG Macchine系列的入门级机型, 半自动型水平缠绕机一直以来都是公司的旗舰机型, 代表着投资与效率的最佳效益比。

由于旋转环的直径不同, 该系列完全覆盖了各种形状和尺寸的任何类型的产品类别。多功能性, 可靠性, 坚固性, 高质量的材料的使用让部件减少了磨损和备件, 降低了维护成本, 这使产品在同类产品中名列前茅。

与半自动型BOX-S相比, 系列BOX-A是全自动的。


BOX-A自动系列的机器灵活, 使用方便。设备可以在操作者的手动操作下进行, 也可全自动运行, 在结构上, 与半自动系列比, 它们配备了带式输送机、光电来侦测产品、垂直压轮来稳定产品在包装过程中的稳定。

所有类型的产品都可以用木材、塑料和金属、铝挤压件、塑料管、纺织品、纸板箱、百叶窗、遮阳篷、木板或金属板、门、百叶窗和所有类型的家具包装。

RANGE OF MODELS

产品型号

BOX 300 A
BOX 500 A
BOX 800 A
BOX 1000 A

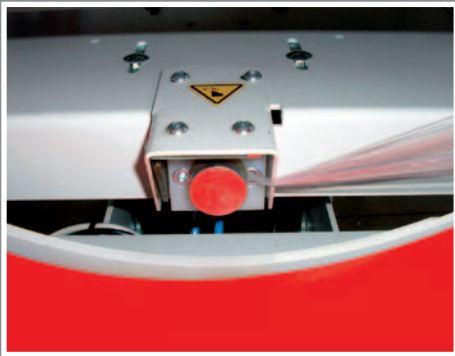

The automatic film hooking, cutting and holding unit allows the automation of the wrapping process.

气动夹膜器和切膜机构, 自动运行在全自动包装过程中



Vertical pressure with free rollers in the input and output pneumatically operated ensures a stable position of the product during the wrapping.

2套垂直压力轮分别位于进料口和出料口, 气动运行方式, 在缠绕过程中分别压住货物, 保证缠绕过程中的稳定性。



From the panel the functions are controlled through the PLC, used to regulate all variable parameters and select one of the 6 banding programs.

触摸屏可设置包装参数, 6种包装模式等, 直接联线到PLC中, 它控制了所有的机器运行。

TECHNICAL PROPERTIES

- Rotation steel unit, high load capacity, driven by wheels which are dragged by a belt.
- Spool holder and gear roller with mechanical adjustable clutch.
- Automatic unit of hooking, holding and cutting.
- Photocell to survey the product for the start and stop of the wrapping cycle.
- PLC to control the wrapping cycle.
- 6 banding programs.
- Ring rotation speed variable.
- Conveyor speed electronically variable through inverter.
- Pneumatic pressure group with free rollers input and output.
- Motorised belt input and output, length.
- Side guides in the input and output.
- Power supply voltage 220V 50-60 Hz single-phase.
- Air pressure in exercise: 6 bar.
- Compressed air consumption: 7 NL/min.
- Control over the wrapping cycle through the external pedal. Start and stop of the process.
- Motorised conveyors in the input and output.
- Manually adjustable conveyor height due to our innovative system R-LOCK with snap in preset gap of 40 mm.

技术描述

- 驱动轮驱动旋转环旋转
- 膜架和齿轮辊机械膜架, 离合器调节束紧力
- 气动冷切割和夹膜器
- 光电自动侦测产品启动和停止缠绕机
- PLC控制包装周期
- 6种缠绕包装模式
- 动力滚筒在进料和出料输送机, 速度可调节通过变频器
- 旋转环的速度可调节, 变频器调节
- 气动压轮在入料和出料处
- 手动调节输送机的高度因为是我们革新即R-LOCK机械结构
- 进料和出料侧边机械导轨
- 气压: 6bar
- 压缩空气消耗量: 7NL/分钟
- 电源: 220V 50HZ 单相



Mod. BOX 500 A