


OPTIONAL BOX-A




V-SHAPED FREE ROLLER CONVEYORS

Unlike the plane roller conveyors, this solution positions always the product in the centre of the conveyors, no matter the shape and size. For this reason it's indicated for round products.

V型输送机

V型输送机让所有产品都居中, 无论产品外形和尺寸



PHOTOCELL FOR THE START OF THE CONVEYORS

Substitutes the pedal for the start of the cycle. Necessary when the machine has to be integrated in an automatic line and the start of the conveyors has to be automatically each time a product arrives.

光电侦测进料产品和启动

有脚踏式半自动启动方式也有和全自动输送机线相联, 光电侦测产品进料和启动缠绕机



ROLLERS PVC COATED

The PVC coating, to avoid scratching, protects the surface of the product during the handling.

PVC滚筒

PVC滚筒避免和产品表面的磨损, 不伤产品和操作者手



LATERAL GUIDES WITH FREE ROLLERS PVC COATED



This option is indicated for products with a delicate surface.

侧导轨

保证产品直线度

技术参数

	BOX 300 A	BOX 500 A	BOX 800 A	BOX 1000 A
Film width (mm) - 膜宽(mm)	160	140	100	90
Ø Max film spool (mm) - 最大Ø F直径 (mm)	125	125	125	125
Ø Core diameter (mm) - 最大膜宽度 Ø (mm)	125	125	125	125
Ø Core diameter (mm) - 纸芯直径	38	38	38	38
Installed powerfull (kW) - 功率 (kW)	0-15	0-13	0-10	0-10
Power Supply - 电源	0,61	0,61	0,61	0,61
Weight (Kg) - 重量(Kg)	200	240	300	360

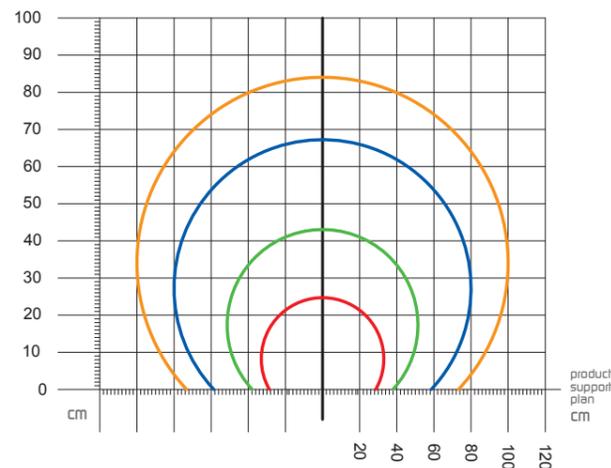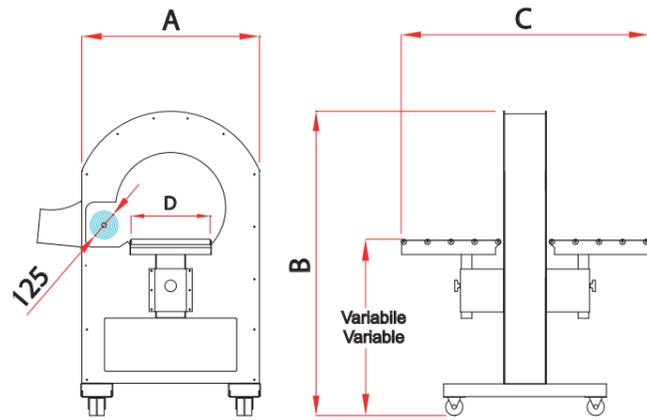


MODEL / 型号	A mm	B mm	C mm	D mm
BOX 300 A	960	1400	1150	260
BOX 500 A	1060	1400	1150	360
BOX 800 A	1430	1650	1150	540
BOX 1000 A	1630	1850	1150	800

■ BOX 300 A	Diameter for passing / 通过环直径	300 mm
■ BOX 500 A	Diameter for passing / 通过环直径	500 mm
■ BOX 800 A	Diameter for passing / 通过环直径	800 mm
■ BOX 1000 A	Diameter for passing / 通过环直径	1000 mm

半自动水平式缠绕机

Model BOX-5 半自动型

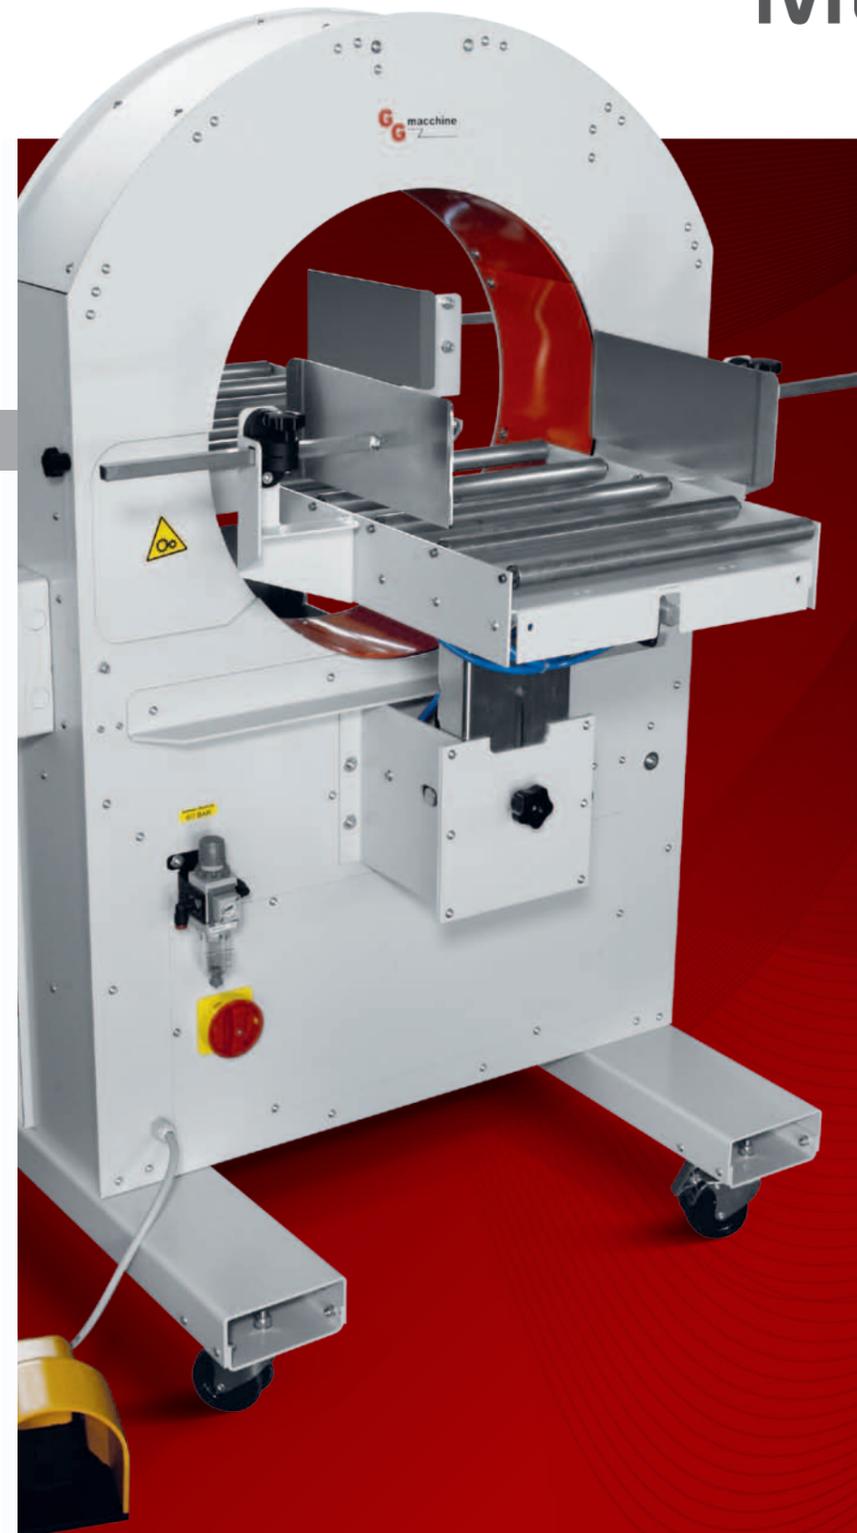

PAIKPAC

派楷包装设备(上海)有限公司

电话: 021-69775066

邮箱: info@paikpac.cn

网址: www.paikpac.cn

半自动水平式缠绕机

型号 BOX-S

STRETCH FILM
SPOOL DIAMETER Ø 125 mm
WIDTH 125 mm

拉伸缠绕膜
膜外径 Ø 125 mm
膜宽度 125 mm
纸芯直径 Ø 38 mm

Mod. BOX 800 S



As entry-level model in the range of GG Macchine, the BOX semi-automatic is ever since the flagship model of the company and represents the best proportion between investment and efficiency.

Due to the different diameters of the rotation unit the range covers completely any type of product category of a large variety of shapes and sizes.

Versatility, usability, robustness, reliability, the use of material which reduces wear and spare parts, and what caps the maintenance costs, this brings the product at the top of its class.

The machines of series BOX are equipped of free rollers conveyors, at call covered in PVC, turn out flexible and simple in their use: after the set of the product the operator starts and controls the cycle with the pedal.

All the operations of winding, hooking and cutting the film happen in automated way.

The BOX semi-automatic is suitable for small and medium-sized productions and where it's not required an automatic production cycle.

All type of products can be wrapped from wooden, plastic and metal profiles, aluminium extrusions, plastic tube, carton boxes, awning and rolling shutter.

GG Macchine系列的入门级机型, 半自动型水平缠绕机一直以来都是公司的旗舰机型, 代表着投资与效率的最佳效益比。由于旋转环的直径不同, 该系列完全覆盖了各种形状和尺寸的任何类型的产品类别。多功能性, 可靠性, 坚固性, 高质量的材料的使用让部件减少了磨损和备件, 降低了维护成本, 这使产品在同类产品中名列前茅。

半自动型BOX-S带进料和出料的无动力PVC滚筒输送机, 灵活和简单使用, 通过脚踏开关启动和停止缠绕机。包装运行过程中带了自动夹膜器, 切膜机构在全自动过程中半自动机器非常适合小和中尺寸的产品, 但不能和输送机线相连形成全自动包装线。

所有类型的产品都可以用木材、塑料和金属、铝挤压件、塑料管、纺织品、纸板箱、百叶窗、遮阳篷、木板或金属板、门、百叶窗和所有类型的家具包装。

RANGE OF MODELS

产品型号

BOX 300 S
BOX 500 S
BOX 800 S
BOX 1000 S

TECHNICAL PROPERTIES

- Rotation steel unit, high load capacity, driven by wheels which are dragged by a belt.
- Spool holder and gear roller mechanical adjustable clutch.
- Automatic unit of hooking, holding and cutting.
- PLC to control the wrapping cycle.
- Ring rotation speed variable.
- Power supply voltage 220V 50-60 Hz single-phase.
- Air pressure in exercise: 6 bar.
- Control over the wrapping cycle through the external pedal. Start and stop of the process.
- Free roller conveyors with zinc rollers infeed and outfeed.
- Infeed and outfeed side guides.
- Manually adjustable conveyor height due to our innovative system R-LOCK with snap in preset gap of 40 mm.

技术描述

- 驱动轮驱动旋转环旋转
- 膜架和齿轮辊机械膜架, 离合器调节束紧力
- 气动冷切割和夹膜器
- PLC控制包装周期
- 旋转环的速度可调节, 变频器调节
- 脚踏开关启动和停止缠绕机
- 无动力滚筒输送机在进料和出料处
- 手动调节输送机的高度因为是我们革新即R-LOCK机械结构
- 进料和出料侧边机械导轨
- 气压: 6bar
- 压缩空气消耗量: 5NL/分钟
- 电源: 220V 50HZ 单相



The spool holder unit is in an easy-to-reach position for a fast change of the spool and insertion of the film.

缠绕膜更换快速和方便。通过透视窗可以看到膜消耗量和运行状态; 操作者打开膜架安全窗, 快速更换新膜卷。



The automatic film hooking, cutting and holding unit allows the automation of the wrapping process.

气动夹膜器和切膜机构, 自动运行在全自动包装过程中。



SETTING OF THE CONVEYOR HEIGHT

Our R-LOCK system enables a quick change of the working height and ensures a perfect flatness between the input and the output conveyors.

手动调节输送机高度。我们的R-LOCK系统使我们能快速调节工作面高度, 确保进料和出料输送机都处一个水平面上。



Mod. BOX 500 S